BEHAVIORS OF PALM KERNEL SHELL STABILIZED BLACK COTTON SOIL ON APPLICATION OF PRESSURE LOAD

Akinola Johnson OLAREWAJU & [2] Abdulwaheed Ahmed OLORUKO-OBA

Civil Engineering Department, Faculty of Engineering,
Federal University, Oye, Ekiti State, Nigeria.
[2] Email: abdulwaheedolorukuooba@gmail.com

ABSTRACT
The properties of the black cotton soil may be altered in many ways through mechanical, chemical and other means. Therefore, it becomes very important to investigate the physical and engineering properties associated with the black cotton soil especially as a construction material or for foundation purposes. The black cotton (expansive) soil was obtained from a borrow pit on the basement complex at Igbo-Ora in Oyo State, South-Western Nigeria within the coordinates Longitude $7^0$24'45" latitude $3^0$18'34". The palm kernel shell wastes were taken from palm oil producing plant along Ilaro-Owode Road, Ilaro, Ogun State, Nigeria. The quantity of water which was used to obtain optimum moisture content and maximum dry density for black cotton soil (i. e. control, 0%) was determined. This water was then used to run consolidation tests. The palm kernel shells were broken into pieces passing through 5mm sieve and then substituted for black cotton soil from 0% to 30% at 10% intervals while 0% palm kernel shell substitution served as control experiment. In line with BS 1377 (1990, 90% consolidation tests were conducted on composite materials to determine the compression and expansion characteristics for the 24-hour soaked samples. From the results, compression behavior is linear meaning; it is directly proportional to time for all the substitutions investigated while for the first 30 seconds, there is no remarkable and noticeable reduction during expansion while removing the load. The rate and magnitude of expansion is minimal for all the substitutions investigated.

KEYWORDS: Black Cotton Soil, Consolidation, Palm Kernel Shell.

1. INTRODUCTION

Black cotton soil is referred to as expansive soils; it is characterized by cracks in dry season and heavens in rainy season for this reason, its geotechnical properties are important to be investigated before allowing any construction above it. The mineralogy of this soil is dominated by the presence of montmorillonite which is characterized by large volume change from wet to dry seasons and vice versa (Rajakumar, 2014; Ola, 1983). High percentage of montmorillonite in black cotton soil renders the soil poor for civil engineering project. The shrinking of the soil results in cracks in the soil without any warning. These cracks can sometimes extent to severe limit. Use of soil that contains montomorillonite for civil engineering project may cause severe damage to the construction as a result of change in atmospheric conditions (Mittal and Shukla, 2001; Ola, 1983). Black cotton soils can be found in semi–arid and arid regions, these areas are naturally categorized by noticeable parched and rainy periods with truncated rain, deprived of drainage as well as high afternoon temperatures. In this region the climatic condition is such that the annual evaporation exceeds the precipitations. Soil stabilization either by mechanical or chemical means is the remedy for shrinkage and swelling of black cotton soil to create an improved Soil material possessing the desired engineering properties. Soils may be stabilized to increase strength and durability of the black cotton soil. Regardless of the purpose for stabilization, the desired result is the creation of a soil material or soil system that will remain in place under the design use conditions for the design life of the civil engineering project. Due to expansive characteristics of black cotton soil, it forms a very poor foundation material for road construction. Black cotton soils are found in the northern and southern parts of Nigeria, the soils are said to be inorganic clays which are expansive in nature (Ola, 1983). They are also known for their shrinkage and swelling nature, Black cotton soils have been a highly challenging material for the construction engineers due to its high swelling rate as well as its shrinkage characteristics. Although, Black cotton soils tend to be strong in its dry state, when in a wet condition, it tends to lose its strength out rightly. The low strength and excessive volume changes of black cotton soil make their use in constructions very difficult. The high volume of axle loads on our roads is currently a challenge on the design of road pavement. Important factors such as durability, strength and economic need have to be paramount in the design and construction of road pavement (Ola, 1983). To tackle these challenges head on at a reduced cost, investigation of potential use of various solid wastes in the production of construction materials should be put on high priority to reduce the cost of construction materials. The properties of the black cotton soil may be altered in many ways through mechanical, chemical and other means. Therefore, it becomes very important to

investigate the physical and engineering properties associated with the black cotton soil especially as a construction material or for foundation purposes (Vinayak Kaushaland and Guleria, 2015). This study is aimed at investigating the engineering properties of black cotton soil from basement complex at Igbo - Ora, Oyo State, South-Western Nigeria, which is stabilized with palm kernel shell with a view to study its suitability for construction materials.

Soil stabilization is widely employed for modifying the geotechnical properties of a soil to improve the engineering properties more so increase the strength of the soil , which in turn also reduce the construction cost of civil engineering projects . Black cotton soils are very poor and undependable subgrade material. When these soils come in contact with moisture its volume increase and decreases when water Is withdrawn. The black cotton soils are very hard when dry but lose its strength completely when wet. Black cotton soils have thus become a global problem that poses several challenges to civil engineering projects. The soil absorbs water heavily during rainy season which results into swelling and softening of the soil. Consequently, it loses its strength and becomes easily compressible (Ola, 1983). The soil shrinks and cracks during the dry season. However, as a result, road built on black cotton soil experience early failure particularly in pavement with heavy traffic. In many situations, soils cannot be used directly as road service layers, foundation layers and as a construction material; hence the properties of those soils should be changed. Expansive soils are one of those kinds of soils whose volume change takes place while it comes in contact with water. It expands during the rainy season due to intake of water and shrinks during dry season. The wetting and drying process of a subgrade layer composed of black cotton soil result into failure of pavements in form of settlement and cracking. Therefore, prior to construction of a road on such subgrade, it is important either to remove the existing soil and replace it with a non-expansive soil or to improve the engineering properties of the existing soil by stabilization using additives such as eggshell powder and palm kernel shells which are source locally and menace to the environment. Stabilization of the expansive soil can be of great value in improving the strength or bearing capacity of soil through controlled compaction test with suitable admixtures or stabilizers. Chen (1975) concluded that expansive soils or Black Cotton Soils are normally found in semi –arid regions of tropical and temperate climate zones and further highlighted that such soil exist in abundant in those areas, where the annual evaporation exceeds the precipitation. It was further stressed that sticky plastic nature of black cotton soils particles causes them to pack up under wheels; animal's feet and clog cultivation implements. They make the soil extremely difficult to extract or dislodge. The cracks measuring 70 mm wide and over 1 m deep were observed. The study has shown that these cracks can extend up to 3m or more in case of high deposits. Seehra (2008) also highlighted in his study that high swelling and shrinkage characteristics of the Black cotton soils are a challenge to the highway engineers. Ola (1983) has done a lot of work on black cotton soil of North Eastern Nigeria, cement, lime and so on were used to stabilize the expansive. Little work has been done on black cotton soil of South Western Nigeria which is the focus of this study. This is with a view to determining the consolidation parameters and settlement indices of stabilized black cotton (expansive) soils on the basement complex and sedimentary formation of part of South Western Nigeria.

2. METHODOLOGY

The black cotton (expansive) soil (Plate 1a) was obtained from a borrow pit on the basement complex at Igbo-Ora in Oyo State, South-Western Nigeria. The borrow site lies within the coordinates Longitude $7^0$24'45" latitude $3^0$18'34". The black cotton soils used in the study were collected from depths between 0.3-1.0m below ground level. The palm kernel shell wastes (Plates 1b, c and d) were taken from palm oil producing plant along Ilaro-Owode Road, Ilaro, Ogun State, Nigeria. The quantity of water which was used to obtain optimum moisture content and maximum dry density for black cotton soil (i. e. control, 0%) was determined. This water was then used to run consolidation tests. The palm kernel shells were broken into pieces passing through 5mm sieve and then substituted for black cotton soil from 0% to 30% at 10% intervals while 0% palm kernel shell substitution served as control experiment. In line with BS 1377 (1990) and other relevant codes of practice (details of which could be found in Joseph (1981)), 90% consolidation tests were conducted on composite materials to determine the compression and expansion characteristics for the 24-hour soaked samples (Ola, (1983); Head and Epps (2011); Head (2006); Indrawan et al. (2006); Hincke et al. (2012); Croft et al. (1999); Amu and Salami (2010); Amu et al. (2005); Gopal and Rao (2000); Craig (1987); Modi (2010); Fattah, Y.M. (2012); Leonards and Girault (1961); Sivakugan (1990); Skempton (1944); Terzaghi and Peck (1967); Wallace and Otto (1964); Wroth and Wood (1978)).



a b c

d Plate 1: (a) Black Cotton (Expansive) Soil (b) Palm Tree (c) Palm Fruits (d) Palm Kernel Shell

3. RESULTS

The results of dial gauge readings (for maximum pressure of 313.92 kN/m^2) against time (minutes) for various palm kernel shell substitutions in black cotton soils ranging from 0% (control experiment) to 30% substitutions are graphically presented in Figures 1 to 4 respectively. (Control experiment) to 30% substitutions are graphically presented in Figures 1 to 4 respectively. From the preliminary results (Figures1 1 to 4), compression behavior is linear meaning, it is directly proportional to time for all the substitutions investigated while for the first 30 seconds, there is no remarkable and noticeable reduction during expansion while removing the pressure load due to plastic nature of the soil at that state.. The rate and magnitude of expansion is minimal for all the substitutions investigated due to elasto-plastic behavior of the soil.

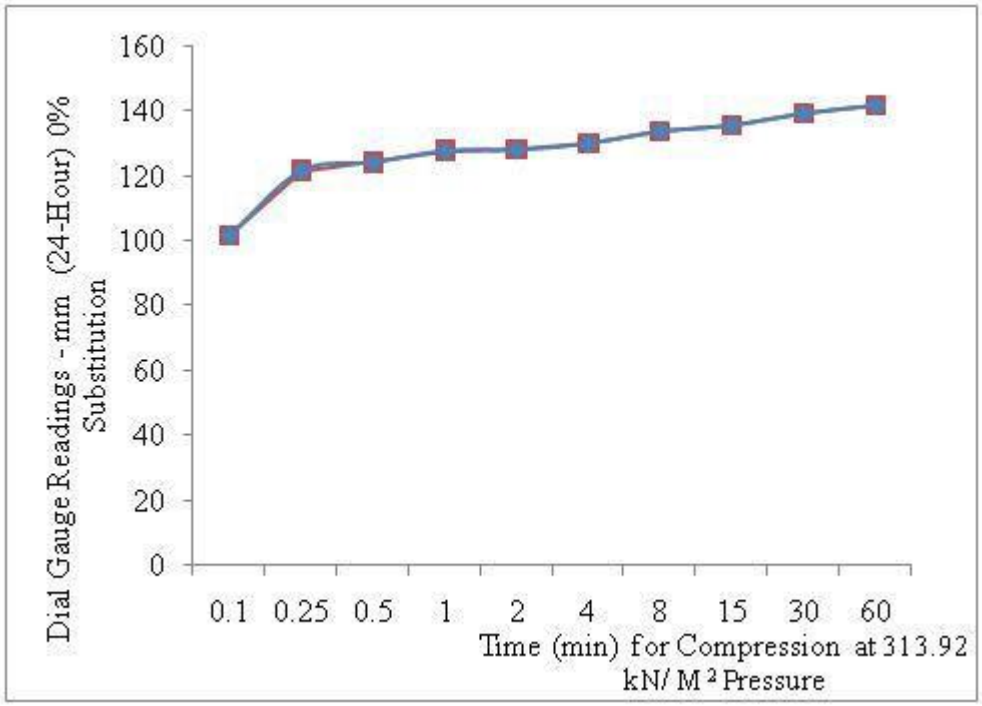


Figure 1: Results of dial gauge reading (mm) against time (min) for 24-hour soaked samples (0% palm kernel shell substitution - compression)

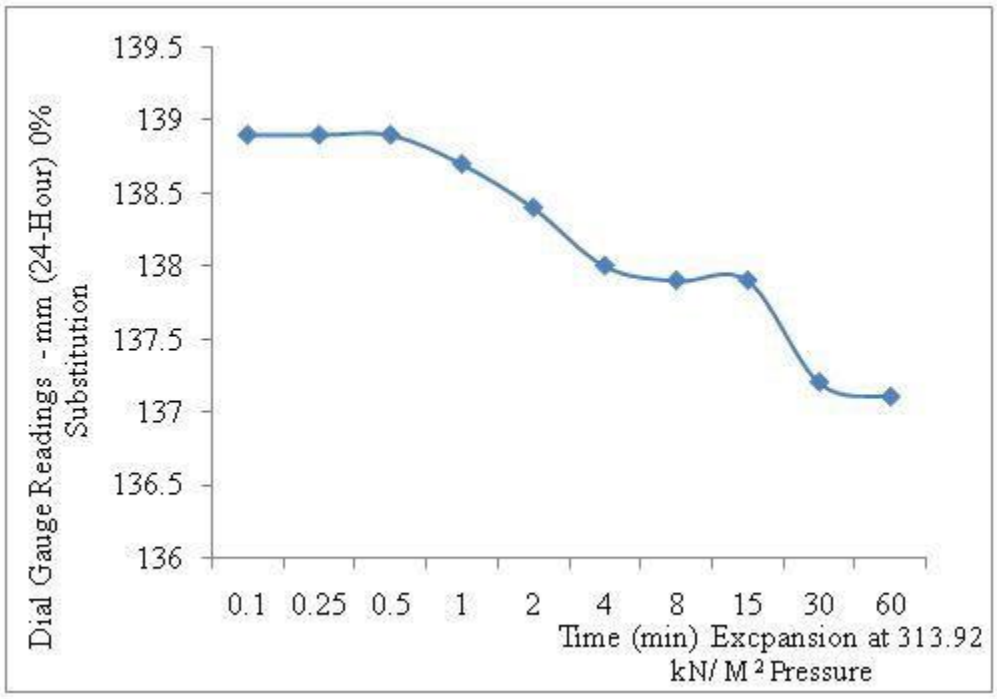


Figure 2: Results of dial gauge reading (mm) against time (min) for 24-hour soaked samples (0% palm kernel shell substitution - expansion)

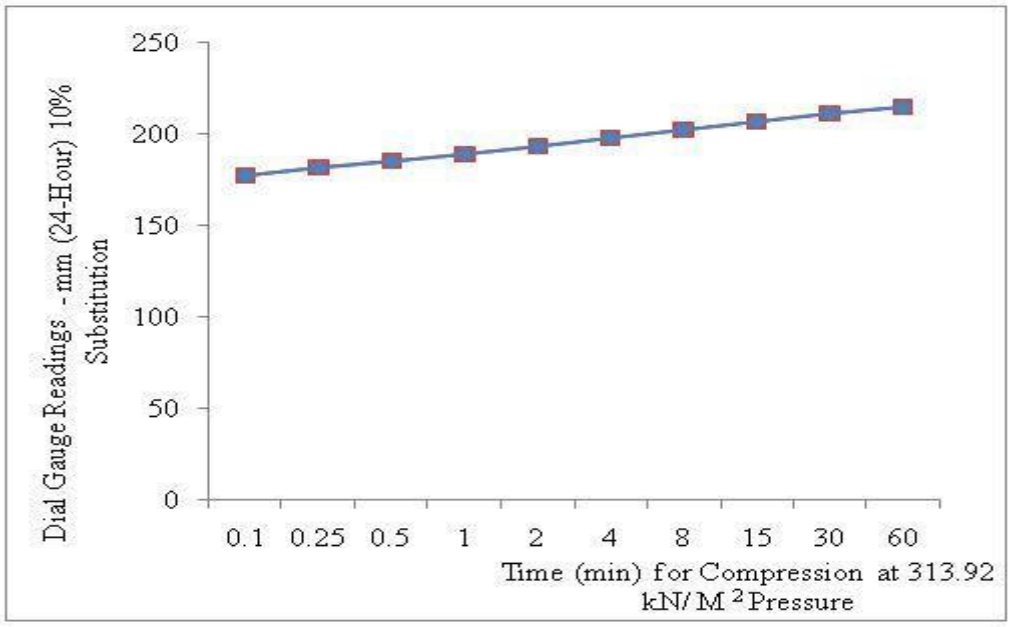


Figure 3: Results of dial gauge reading (mm) against time (min) for 24-hour soaked samples (10% palm kernel shell substitution - compression)

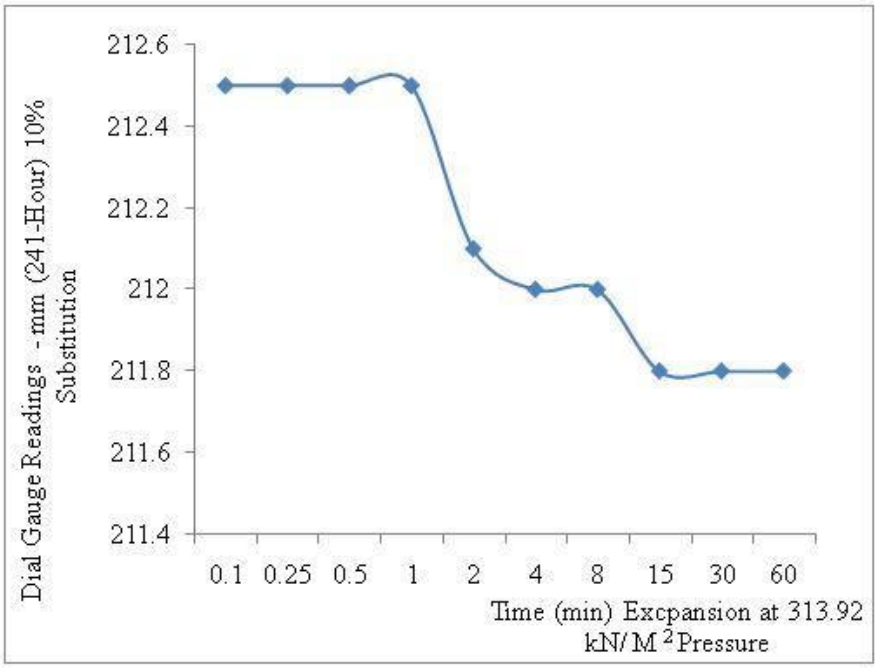


Figure 4: Results of dial gauge reading (mm) against time (min) for 24-hour soaked samples (10% palm kernel shell substitution - expansion)

4. DISCUSSION

The results of compression and expansion of the black cotton soil of Igbo-Ora in South Western Nigeria is extensively discussed below. Figure 1 shows a linear graph for the compression of 24 hours soaked samples for pressure of 313.92KN/m³ at 0% palm kernel shell substitution. Where there is 40mm change in the dial gauge reading for time duration of 60 minutes. Figure 2 shows a constant dial gauge reading for a short duration of 0.5 minute for the case of expansion of 24 hours soaked samples for the same pressure load of 313.92KN/m³ at 0% palm kernel shell substitution (control experiment) where there is 1.6mm change in the dial gauge reading for the time duration of 60 minutes. In addition to this, Figure 3 shows a linear graph for the compression of 24 hours soaked samples for the same pressure load of 313.92KN/m³ at 10% palm kernel shell substitution, where there is 25mm change in the dial gauge reading for time duration of 60 minutes. Furthermore, Figure 4 shows a constant dial gauge reading for a short duration of 0.5 minute for the expansion of 24 hours soaked samples for the same pressure load of 313.92KN/m³ at 10% palm kernel shell substitution. In this case, there is 0.7mm change in the dial gauge reading for time duration of 60 minutes. Other cases shows a linear graph for the compression of 24 hours soaked samples for pressure load of 313.92KN/m³ at 20% palm kernel shell substitution, there is 32mm change in the dial gauge reading for time duration of 60 minutes. In addition to this, in other cases investigated, there is a constant dial gauge reading for a short duration of 0.5 minute for expansion of 24 hours soaked samples for pressure of 313.92KN/m³ at 20% palm kernel shell substitution, where there is 1.0mm change in the dial gauge reading for time duration of 60 minutes. The preliminary results figures shows much resistance against volume decrease when the expansive soil stabilized with palm kernel shell is subjected to a pressure load and for this reason, the palm kernel shell can be recommend as a good stabilizer for black cotton soil. The difference in the dial gauge readings for compression and expansion for 60minutes duration in the each of the preliminary results Figures and other cases investigated are hereby summarized; Figure 1 is 40mm; Figure 2 is 1 mm; Figure 3 is 37.5 mm; Figure 4 is 0.7 mm; others are 33 mm; 1 mm; 26.2 mm and finally 2 mm (Ola, 1983).

Volumetric changes, swelling and shrinkage, of expansive soils in the presence and absence of water are

undesirable from stability reasons due to elasto-plastic behavior. The consequence of swelling and shrinkage leads to an increase and decrease in volume till suction pressure comes to equilibrium as determined by the environment. The amount of swelling and shrinkage to satisfy the suction pressure depends on the magnitude of the vertical loading and soil properties that include soil composition, natural water content and density, as well as soil structure. The rate of swelling and shrinkage depends on the coefficient of permeability (hydraulic conductivity), thickness, and soil properties. If a structure is founded on such expansive soils, then its presence along with the foundation prevents this volume increase (swelling) and decrease (shrinkage) as a consequence, leads to swelling and shrinkage pressure. This swelling and shrinkage pressure has serious consequences in the form of cracks and distress on the structures founded on such expansive soils. Lightweight structures are severely affected due to high swelling and shrinkage pressure exerted by the black cotton soil.

5. CONCLUSION

Compression and expansion characteristics and behavior of stabilized black cotton soil on basement complex has been investigated. From the preliminary results, compression behavior is directly proportional to time for all the substitutions investigated while for the first 30 seconds, there is no remarkable and noticeable reduction during expansion while removing the load as a results elasto-plastic behavior of the soil. The rate and magnitude of expansion is minimal for all the substitutions investigated. Efforts are still on-going to determine the relevant consolidation parameters and settlement indices of stabilized black cotton soil on basemen complex as well as sedimentary formation. The materials used for stabilization of these black cotton soils are palm kernel shell and eggshell powder.

6. ACKNOWLEDGEMENT

The author acknowledges the contributions of BAMISAYE Ayodele, OGUNJIMI Wale, ADEGBESIN Ayodeji, ADEWUNMI Francis and FALOLA Ebenezer as well as Aro, M. O. for technical assistance in the Geotechnical and Material Laboratories of the Federal Polytechnic Ilaro, Ogun State, Nigeria. Special thanks to Teejay O. Allinson Nigeria Enterprises, Ikate, Surulere, Lagos with palm kernel oil factory located at Olorunsomo, Sabo, Ilaro, Ogun State, Nigeria.

REFERENCES

Amu, O.O. & Salami, B.A. (2010). Effect of common salt on some engineering properties of eggshell stabilized lateritic soil. ARPN Journal of Engineering and Applied Sciences, 5(9), 64-73.

Amu, O.O., Fajobi, A.B. & Oke, B.O. (2005). Effect of eggshell powder on the stabilizing potential of Lime on an expansive clay soil. Applied Sci, 5, 1474-1478.

BS1377, (1990): Methods of Testing Soil for Civil Engineering Purposes. British Standards Institute, London

Chen.F.H (1975): Foundations on Expansive Soils, Elsevier Scientific Pub. Co. Amsterdam. Craig, R. F (1987): "Soil Mechanics", Spon Press, Philadephia USA 4th edition.

Croft, C.P., McGeory, D. & Carlson, D.H. (1999). Physical geology. McGraw Hill Companies Inc., New York, 48-56.

Fattah, Y.M. (2012):"Effect of change in the coefficient of permeability on consolidation characteristics of clay" Journal of Civil Engineering, Vol. 18

Gopal, R. & Rao A. S. R. (2000):"Basic and applied soil mechanics" (revised second edition), Pg 233.

Head, K.H. and R.J. Epps, (2011): Manual of soil laboratory testing, volume 2. Whittles publishing, Dunbeath, Caithness KW6 6EY, Scotland, UK.

Leonards, G.A. and Girault, P. (1961). A Study of the One-Dimensional Consolidation Test, Proc. Fifth Int. Conf. on Soil Mechanics and Found. Eng., Paris, Vol. 1, 116-130.

Joseph E. Bowles, (1981): Engineering Properties of Soil and Their Measurement, 2nd edition, International Student Edition, McGraw-Hill, Inc., London

Maail, Shukri, Bujang B.K., Huat, Suhaimi Jamaludin, Sew, G. S. and Ali, F.H. (2004): "Index, engineering properties and classification of tropical residual soils". Tropical Residual Soils Engineering 57-71

Mittal.S and Shukla.J.P (2001): Soil Testing for Engineers. Khanna Publishers, New Delhi.

Modi P. N. (2010):"Soil Mechanics and Foundation Engineering" First edition, Radha Press, Kailsh Nagar, Delhi-110031, pg 399

Nuhu-Koko.M.K (1990): The use of Palm kernel shells as aggregates for concrete, Paper presented at 21st Annual Conference of Materials Testing, Control and Research, Federal Ministry of Works, Lagos, Nigeria.

Ola, S. A. (1983). Tropical Soils of Nigeria in Engineering Practice, A. A. Balkema/Rotterdam, ISBN: 90-6191-364-4, Netherland.

Rajakumar (2014): California bearing ratio of expansive Sub grade stabilized with waste materials.

Seehra (2008): Practical Problems of Highway Construction in Black Cotton Soil Areas and In Place Remedial Measures.

Sivakugan, N., (1990). Development of Marshy Areas in Colombo, Sri Lanka, Proc. Tenth Southeast Asian Geot. Conf., Taipei, Vol. 1, 469-472.

Skempton, A. W. (1944). Notes on the Compressibility of Clays. Q. J. Geol. Soc. London, 100(1-4), 119-135.

Terzaghi, K. and Peck, R.B., (1967). Soil Mechanics in Engineering Practice, John Wiley & Sons, New York, 729 pp.

Vinayak Kaushal and Guleria.S.P (2015): Geotechnical Investigation of Black Cotton Soils.

Wallace, G.B and Otto, W.C. (1964). Differential Settlement at Selfridge Air Force Base, Journal. of Soil Mechanics and Found. Div., ASCE, Vol. 90, No. SM5, 197-220.

Wroth, C. P. and Wood, D. M. (1978).The correlation of Index Properties with Some Basic Engineering Properties of Soils. Canadian Geotechnical Journal, 15, 137-145.